HLA-1250 RP

Hybrid Line Array Series



EXPERIENCE THE SOUND OF TRUE ENGAGEMENT

True Sound Engagement in Large Venues

DESCRIPTION

The **HLA-1250RP** is a hybrid integration of a twelve element J-array and staged dual dipole directional mid/low frequency loudspeakers. It is powered by a Powersoft rack-mount 4800-Watt amplifier with on-board DSP.

The J-array portion contains twelve 3.5" voice-range drivers and twelve ribbon high frequency drivers. The mid/low frequency portion incorporates four 6.5" mid-bass drivers, and four 8" low frequency drivers in a sequentially staged dipole configuration to extend vertical LF control.

It has been preconfigured in an asymmetrical 120° H by 50° V coverage pattern with vertical directivity to 96 Hz, and low frequency response to 60 Hz.



KEY FEATURES

- Asymmetrical 120° H x 50° V Coverage
- Power and DSP by Powersoft
- Maintains Vertical Control to 96 Hz

APPLICATIONS

- Churches
- Lecture Halls
- Presentation Spaces
- Performing Arts Centers

DESCRIPTIVE DATA

System Configuration:	Quad-amped hybrid integration of a curvilinear M/H line array, and staged dipole mid-bass & low frequency elements
Components & Loading:	(12) 3.5" MF drivers; (12) 3.5" ribbon HF drivers; (4) 6.5" mid-bass drivers; (4) 8" LF drivers
Input:	Balanced line level with XLR
Enclosure Type:	Curvilinear array: sealed enclosure Dipole mid-bass: sealed enclosures Dipole LF: sealed enclosure
Enclosure Material:	Steel, aluminum & Baltic Birch plywood
Finish:	Black or White standard (custom colors available)
Suspension Hardware:	(2) 3/8-16 threaded points on each side; steel yoke included
Grille:	Painted perforated steel

NOMINAL DATA


Frequency Response:		60 – 20,000 Hz ±3 dB
		4800 W RMS
Maximum Long-Term Output: Peak Output:		121 dB 127 dB
		120° H x 50° V
Dimensions	Height: Width: Depth:	41.44" / 1053 mm 21.13" / 537 mm 14.06" / 357mm
		107 lbs / 48.6 kg
Shipping Weight:		121 lbs / 55.0 kg

HLA-1250 RP

Hybrid Line Array Series



DIMENSIONAL DRAWINGS

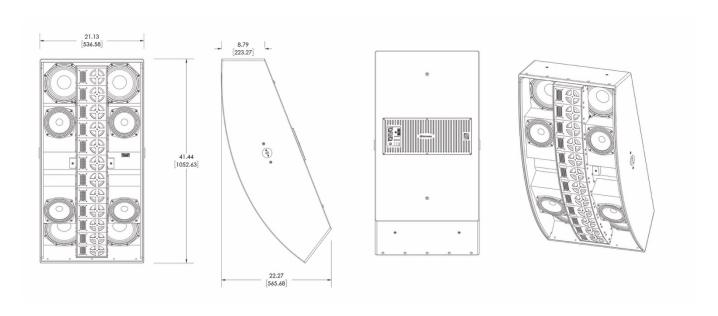

INCLUDED HARDWARE

U-bracket





OPTIONAL HARDWARE

Wall-Mount
HLA-9-WM